x

Axis Cameras Spec

CCTV - DVR - ACCESS CONTROL - IBS...!

Product Name	Description		Status
Network Cameras			
Fixed Cameras			
AXIS 206	Indoor camera, fixed lens. Down to 4 lux. Compact design. Up to VGA 640x480 resolution at 30 fps frame rate. Motion JPEG. Supports local languages. Includes recording software, adjustable stand, and power supply.		**EOL 01 Oct 09**
AXIS 206 10-pack/bulk	AXIS 206 in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		**EOL 01 Oct 09**
AXIS 206 Surveillance Bundle	Bundle with 4 units of AXIS 206 network cameras and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Note: Multiple orders of this SKU will not result in 8-, 12-, 16-license, etc of ACS. Additional cameras and ACS 1 or 5 upgrade licenses must be ordered separately.		**EOL 01 Oct 09**
AXIS 207	Indoor camera, fixed lens. Motion JPEG and MPEG-4 network camera. True bandwidth-efficient MPEG-4. Down to 1 lux. Compact design. Up to VGA 640x480 resolution at 30 fps frame rate. Audio AAC with built-in microphone. Includes recording software, adjustable stand / clamp for easy mounting, and power supply.		**EOL 01 Dec 09**
AXIS 207 10-pack/bulk	AXIS 207 in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		**EOL 01 Dec 09**
AXIS 207 Surveillance Kit	Bundle with 4 units of AXIS 207 and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Note: Multiple orders of this SKU will not result in 8-, 12-, 16-license, etc of ACS. Additional cameras and ACS 1 or 5 upgrade licenses must be ordered separately.		**EOL 01 Dec 09**

AXIS 207W	Indoor camera, fixed lens. Connects both over wireless LAN (IEEE 802.11g) or wired Ethernet. Motion JPEG and MPEG-4 network camera. True bandwidth-efficient MPEG-4. Down to 1 lux. Compact design. Up to VGA 640x480 resolution at 30 fps frame rate. Audio AAC with built-in microphone. Includes recording software, adjustable stand / clamp for easy mounting, and power supply.		
AXIS 207W 10-pack/bulk	AXIS 207W in **10-pack**. Cannot be sold separately. Power supplies included.		
AXIS 207MW	Indoor Megapixel camera, fixed lens. Connects both over wireless LAN (IEEE 802.11g) or wired Ethernet. Motion JPEG and MPEG-4. Up to 1280x1024 resolution. Compact design. Audio AAC with built-in microphone. Includes recording software, adjustable stand / clamp for easy mounting, and power supply.		
AXIS 207MW 10-pack/bulk	AXIS 207MW in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS M1011	Small-sized indoor network camera. Fixed lens. 1/4" progressive scan CMOS sensor. Multiple, individually configurable H.264, Motion JPEG and MPEG-4 Part 2 streams; max VGA 640 x 480 resolution at 30 fps. Video motion detection. Includes stand and clamp for easy mounting, and power supply.		
AXIS M1011 10-pack/bulk	AXIS M1011 in 10-pack/bulk. Cannot be sold separately as single packs. Power supplies included. No clamps.		
AXIS M1011 Surveillance Kit	Bundle with 4 units of AXIS M1011 and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Additional cameras and AXIS Camera Station 1 or 5 upgrade licenses can be ordered separately.		
AXIS M1011-W	Small-sized indoor network camera. Fixed lens. 1/4" progressive scan CMOS sensor. Connects over wireless LAN (IEEE 802.11g) or wired Ethernet. Multiple, individually configurable H.264, Motion JPEG and MPEG-4 Part 2 streams; max VGA 640 x 480 resolution at 30 fps. Video motion detection. Includes stand and clamp for easy mounting, and power supply.		
AXIS M1011-W 10-pack/bulk	AXIS M1011-W in 10-pack/bulk. Cannot be sold separately as single packs. Power supplies included. No clamps.		

AXIS M1031-W	Small-sized indoor network camera. Fixed lens. 1/4" progressive scan CMOS sensor. Connects over wireless LAN (IEEE 802.11g) or wired Ethernet. Multiple, individually configurable H.264, Motion JPEG and MPEG-4 Part 2 streams; max VGA 640 x 480 resolution at 30 fps. Two-way audio with built-in microphone and speaker. Video motion and audio detection. Passive infrared (PIR) sensor and white LED illuminator integrated. Includes stand and clamp for easy mounting, and power supply.		
AXIS M1031-W 10-pack/bulk	AXIS M1031-W in 10-pack/bulk. Cannot be sold separately as single packs. Power supplies included. No clamps.		
AXIS M1031-W Surveillance Kit	Bundle with 4 units of AXIS M1031-W and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Additional cameras and AXIS Camera Station 1 or 5 upgrade licenses can be ordered separately.		
AXIS M1054	Small-sized indoor network camera. Fixed lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Two-way audio with built-in microphone and speaker. Video motion and audio detection. Integrated passive infrared (PIR) sensor, white LED illuminator and I/O ports. Powered over Ethernet or by power supply. Includes stand and clamp for easy mounting, optional extension for stand and power supply.		**To be launched**
AXIS 210	Indoor camera, fixed lens. 1/4" progressive scan CCD. Up to VGA 640x480 resolution at 30 fps frame rate. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Includes adjustable stand and power supply.		
AXIS 210 10-Pack/bulk	AXIS 210 in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 210 Surveillance Bundle	Bundle with 4 units of AXIS 210 and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Note: Multiple orders of this SKU will not result in 8-, 12-, 16-license, etc of ACS. Additional cameras and ACS 1 or 5 upgrade licenses must be ordered separately.		
AXIS 210 Barebone 10-pack/bulk	AXIS 210 Barebone in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		

x

AXIS 210A	Indoor camera, fixed lens. 1/4" progressive scan CCD. Up to VGA 640x480 resolution at 30 fps frame rate. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Audio full duplex G.711 with built-in microphone. Includes adjustable stand and power supply.		
AXIS 210A 10-pack/bulk	AXIS 210A in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 210A Surveillance Kit	Bundle with 4 units of AXIS 210A and a 4-license AXIS Camera Station surveillance software for video monitoring, recording and event management. Note: Multiple orders of this SKU will not result in 8-, 12-, 16-license, etc of ACS. Additional cameras and ACS 1 or 5 upgrade licenses must be ordered separately.		
AXIS 210A Barebone 10 pack/ bulk	AXIS 210A Barebone in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS P1311	Fixed, CS-mount lens, 1/4” progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max VGA 640 x 480 resolution at 30 fps. MPEG-4 Part 2 also supported. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Includes power supply.		
AXIS P1311 10-pack/bulk	AXIS P1311 in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P1311 Barebone 10-pack/bulk	AXIS P1311 Barebone in 10-pack. Cannot be sold separately as single packs. No power supplies. No lens.		

AXIS P1343	SVGA, day/night, fixed camera with varifocal 3-8 mm DC-iris lens and remote back focus. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.		
AXIS P1343 10-pack/bulk	AXIS P1343 in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P1343 Barebone 10-pack/bulk	AXIS P1343 Barebone in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P1344	HDTV, day/night, fixed camera with varifocal 3-8 mm DC-iris lens and remote back focus. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.		
AXIS P1344 10-pack/bulk	AXIS P1344 in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P1344 Barebone 10-pack/bulk	AXIS P1344 Barebone in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P1346	HDTV, day/night, fixed camera with varifocal 4-10 mm P-Iris lens and remote back focus (camera also supports DC-iris lenses). Multiple, induvidually configurable H.264 and Motion JPEG streams; max 3MP resolution at 20 fps, or HDTV 1080p at 30 fps. Digital PTZ support includes multi-view streaming of different view areas. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling, SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Power supply not included.		
AXIS P1346 10-pack/bulk	AXIS P1346 in 10-pack. Cannot be sold separately as single packs. No power supplies.		**New**

x

AXIS P1346 Barebone 10-pack/bulk	AXIS P1346 Barebone in 10-pack. Cannot be sold separately as single packs. No power supplies.		**New**
AXIS 211	Varifocal DC-iris lens. 1/4" progressive scan CCD. Down to 0.75 lux. Up to VGA 640x480 resolution at 30 fps frame rate. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Power over Ethernet. Includes adjustable stand and power supply.		
AXIS 211 10 pack/bulk	AXIS 211 in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 211 Outdoor Verso Bundle	Bundle with 1 unit of AXIS 211 and Verso outdoor housing (0217-001). Including wall mount (0217-031) and power supply (0217-011). NOT FOR USA		
AXIS 211 Outdoor T92A Kit	Bundle with 1 unit of AXIS 211 and AXIS T92A00 Housing (5015-001) aluminum outdoor housing. Including wall mount (0217-031). NOT FOR USA		
AXIS 211 Barebone 10 pack/bulk	AXIS 211 Barebone in **10-pack**. Cannot be sold separately. Power supplies included.		
AXIS 211A	Varifocal DC-iris lens. 1/4" progressive scan CCD. Down to 0.75 lux. Up to VGA 640x480 resolution at full 30 fps frame rate. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Audio full duplex G.711 with built-in microphone. Power over Ethernet. Includes adjustable stand and power supply.		
AXIS 211A 10-Pack/bulk	AXIS 211A in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 211A Barebone 10 Pack/bulk	AXIS 211A Barebone in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		

x

AXIS 211M	1.3 Megapixel 1/3" progressive scan CMOS sensor. Varifocal DC-iris F1.0 lens. Simultaneous Motion JPEG and MPEG-4 in full megapixel 1280x1024 resolution. 12 frames per second in full resolution, 30 frames per second in partial scan 800x600. Video Motion Detection and I/O for alarm/event handling. Two-way, full duplex audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes adjustable stand and power supply.		
AXIS 211M 10 pack/bulk	AXIS 211M in **10-pack**. Cannot be sold separately as single packs. No power supplies.		
AXIS 211M Barebone 10-pack/bulk	AXIS 211M **Barebone** in **10-pack**. Cannot be sold separately as single packs. No power supplies.		
AXIS 211M Outdoor Verso Bundle	Bundle with 1 unit of AXIS 211M and Verso outdoor housing (0217-001). Including wall mount (0217-031) and power supply (0217-011). NOT FOR USA		
AXIS 211M Outdoor T92A Kit	Bundle with 1 unit of AXIS 211M and AXIS T92A00 Housing (5015-001) aluminum outdoor housing. Including wall mount (0217-031). NOT FOR USA		
AXIS 211W	Varifocal DC-iris lens. 1/4" progressive scan CMOS. Connects over wireless LAN (IEEE 802.11g) or wired Ethernet. Exchangeable antenna. Down to 0.75 lux. Up to VGA 640x480 resolution at full 30 fps frame rate. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Two-way, full duplex audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes antenna, adjustable stand and power supply.		
AXIS 211W 10 Pack/bulk	AXIS 211W in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 211W Outdoor Verso Bundle with outdoor antenna	Bundle with 1 unit of AXIS 211W and Verso outdoor housing (0217-001). Including wall mount (0217-031) and power supply (0217-011) and antenna (same as in 5500-311). NOT FOR USA		

AXIS 221	Varifocal DC-iris lens. 1/3" progressive scan CCD. Down to 0.65 lux in color. Auto day/night mode. Up to VGA 640x480 resolution at 45 frames per second. Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Power over Ethernet. RS-232/485 for data and PTZ control. Includes adjustable stand and power supply.		
AXIS 221 10-pack/bulk	AXIS 221 in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 221 Barebone 10 Pack/bulk	AXIS 221 Barebone in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS 221 Outdoor Verso Kit	Bundle with 1 unit of AXIS 221 and Verso outdoor housing (0217-001). Including wall mount (0217-031) and power supply (0217-011). NOT FOR USA		
AXIS 221 Outdoor T92A Kit	Bundle with 1 unit of AXIS 221 and AXIS T92A00 Housing (5015-001) aluminum outdoor housing. Including wall mount (0217-031). NOT FOR USA		
AXIS 221 Outdoor T92A Night Kit	Bundle with 1 unit of AXIS 221 and AXIS T92A00 Housing (5015-001) aluminum outdoor housing and AXIS T90A21 IR-LED 50-100 DEG (5013-211). Including wall mount (0217-031). NOT FOR USA		
AXIS 223M	2.0 Megapixel 1/2.7" CCD. Varifocal DC-iris Megapixel lens. Auto day/night mode. Up to 1600x1200 resolution. Up to 12 frames per second in 16:9. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Two-way audio AAC/G.711. Power over Ethernet. RS-232 & RS-485 for data. Includes power supply.		
AXIS 223M 10-pack/bulk	AXIS 223M in 10-pack. No power supply.		**EOL, Replaced by 0247-031**
AXIS 223M 10-pack/bulk	AXIS 223M in **10-pack**. Cannot be sold separately as single packs. No power supplies.		
AXIS 223M Barebone 10-pack/bulk	AXIS 223M in Barebone **10-pack**. Cannot be sold separately as single packs. No power supplies. No Lens		

x

AXIS 223M Outdoor Verso Kit	Bundle with 1 unit of AXIS 223M and Verso outdoor housing (0217-001). Including wall mount (0217-031) and power supply (0217-011). NOT FOR USA		
AXIS 223M Outdoor T92A Kit	Bundle with 1 unit of AXIS 223M and AXIS T92A00 Housing (5015-001) aluminum outdoor housing. Including wall mount (0217-031). NOT FOR USA		
AXIS Q1755 50Hz	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.		
AXIS Q1755 60Hz	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.		
AXIS Q1755 50Hz with PoE midspan	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.Includes one-port Midspan.		
AXIS Q1755 60Hz with PoE midspan	2.0 Megapixel HDTV camera with 10x zoom, auto focus and day/night mode. Complying with SMPTE standards for HDTV 1080i and 720P. 25/30 in all resolutions in H.264 or Motion JPEG. Video motion detection and active tampering alarm. Gatekeeper functionality. I/O for alarm/event handling. Two-way audio with audio detection alarm. Power over Ethernet. Power supply not included.Includes one-port Midspan.		
AXIS Q1755 50Hz 10-pack/bulk	AXIS Q1755 50Hz in 10-pack. Cannot be sold separately as single packs. No midspan.		

x

AXIS Q1755 60Hz 10-pack/bulk	AXIS Q1755 60Hz in 10-pack. Cannot be sold separately as single packs. No midspan.		
AXIS Q1755 Outdoor T92A Kit	Bundle with 1 unit of AXIS Q1755 50 Hz (0303-001) and AXIS T92A00 Housing (5015-001) aluminum outdoor housing. Including Wall mount (0217-031). NOT FOR USA		
Fixed Dome Cameras			
AXIS 209FD	Indoor camera, fixed lens. 1/4" high-quality progressive-scan CMOS sensor. Flat, discreet and tamper-resistant casing. Up to VGA 640x480 resolution at 30 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and alarm/event handling. Power over Ethernet incl one-port Midspan.		
AXIS 209FD 10-pack/bulk	AXIS 209FD in **10-pack without** Midspans. Cannot be sold separately as single packs.		
AXIS 209MFD	Indoor camera, fixed lens. 1.3 megapixel 1/3" progressive-scan CMOS sensor. Flat, discreet and tamper-resistant casing. Up to 1280x1024 megapixel resolution at 12 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and alarm/event handling. Power over Ethernet incl one-port Midspan.		
AXIS 209MFD 10-pack/bulk	AXIS 209MFD in **10-pack without** Midspans. Cannot be sold separately as single packs		
AXIS 209FD-R	Fixed dome camera with rugged design, adapted for mobile video surveillance. Fixed lens. 1/4" high-quality progressive-scan CMOS sensor. Flat, discreet and tamper-resistant casing. Up to VGA 640x480 resolution at 30 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and alarm/event handling. Power over Ethernet only. Rugged RJ-45 network connector. Includes one-port Midspan.		
AXIS 209FD-R 10-pack/bulk	AXIS 209FD-R in **10-pack** excluding one-port Midspans. Cannot be sold separately as single packs		
AXIS 209FD-R 50-pack/bulk	AXIS 209FD-R in **50-pack** excluding one-port Midspans. Cannot be sold separately as single packs		

AXIS 209MFD-R	Fixed dome camera with rugged design, adapted for for mobile video surveillance. Fixed lens. 1.3 megapixel 1/3" progressive-scan CMOS sensor. Flat, discreet and tamper-resistant casing. Up to 1280x1024 megapixel resolution at 12 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and alarm/event handling. Power over Ethernet only. Rugged RJ-45 network connector. Includes one-port Midspan.		
AXIS 209MFD-R 10-pack/bulk	AXIS 209MFD-R in **10-pack** excluding one-port Midspans. Cannot be sold separately as single packs		
AXIS 209MFD-R 50-pack/bulk	AXIS 209MFD-R in **50-pack** excluding one-port Midspans. Cannot be sold separately as single packs		
AXIS M3113-R	Fixed dome camera with rugged design, adapted for mobile video surveillance. Fixed lens. Flat, discreet and tamper-resistant casing. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Rugged RJ-45 network connector, Power over Ethernet. Includes lens tool and mounting adapters. Midspan not included.		
AXIS M3114-R	Fixed dome camera with rugged design, adapted for mobile video surveillance. Fixed lens. Flat, discreet and tamper-resistant casing. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Rugged RJ-45 network connector, Power over Ethernet. Includes lens tool and mounting adapters. Midspan not included.		
AXIS M3011	Ultra-discreet fixed dome camera for recessed mounting in drop ceilings. Fixed lens. 1/4" progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max VGA 640 x 480 resolution at 30 fps. MPEG-4 Part 2 also supported. Video motion detection. Power over Ethernet only, one-port midspan included.		
AXIS M3011 10-pack/bulk	AXIS M3011 in 10-pack. Cannot be sold separately as single packs. NO Midspans		

AXIS M3014	Ultra-discreet fixed dome camera for recessed mounting in drop ceilings. Fixed lens, progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. Video motion detection. Power over Ethernet, one-port midspan included.		
AXIS M3014 10-pack/bulk	AXIS M3014 in 10-pack. Cannot be sold separately as single packs. NO Midspans		
AXIS M3203	Fixed dome with discreet and tamper-resistant casing. Varifocal 2.8-10 mm lens with fixed iris. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.		**To be launched**
AXIS M3203-V	Fixed dome with discreet and vandal-resistant casing. Varifocal 2.8-10 mm lens with fixed iris. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.		**To be launched**
AXIS M3204	Fixed dome with discreet and tamper-resistant casing. Varifocal 2.8-10 mm lens with fixed iris. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.		**To be launched**
AXIS M3204-V	Fixed dome with discreet and vandal-resistant casing. Varifocal 2.8-10 mm lens with fixed iris. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. Video motion detection and active tampering alarm. Power over Ethernet. Midspan not included.		**To be launched**
AXIS 216FD	Varifocal DC-iris lens. 1/4" high-quality progressive scan CMOS sensor. Fixed dome with discreet and tamper-resistant casing. Up to VGA 640x480 resolution at 30 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Two-way audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes power supply.		
AXIS 216FD 10-pack/bulk	AXIS 216FD in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		

x

AXIS 216FD-V	Varifocal DC-iris lens. 1/4" high-quality progressive scan CMOS sensor. Fixed dome with vandal-resistant and compact indoor casing. Up to VGA 640x480 resolution at 30 frames per second. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Two-way audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes power supply.		
AXIS 216FD-V 10-pack/bulk	AXIS 216FD-V in **10-pack**. Cannot be sold separately as single packs. Power supplies included.		
AXIS P3301	Fixed dome with discreet and tamper-resistant casing. Varifocal 2.8-10 mm lens. 1/4" progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max. VGA 640 x 480 resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone, and audio detection. I/O for alarm/event handling. Power over Ethernet. Includes power supply		
AXIS P3301 10-pack/bulk	AXIS P3301 in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS P3301-V	Fixed dome with discreet and vandal-resistant casing. Varifocal 2.8-10 mm lens. 1/4" progressive scan CMOS sensor. Multiple, individually configurable H.264 and Motion JPEG streams; max. VGA 640 x 480 resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone, and audio detection. I/O for alarm/event handling. Power over Ethernet. Includes power supply.		
AXIS P3301-V 10-pack/bulk	AXIS P3301-V in 10-pack. Cannot be sold separately as single packs. No power supplies.		
AXIS 216MFD	1.3 Megapixel 1/3" progressive scan CMOS sensor. Varifocal DC-iris lens. Fixed dome with discreet and tamper-resistant indoor casing. Simultaneous Motion JPEG and MPEG-4 in full megapixel 1280x1024 resolution. 12 frames per second in full resolution, 30 frames per second in partial scan 800x600. Video Motion Detection and I/O for alarm/event handling. Two-way audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes power supply.	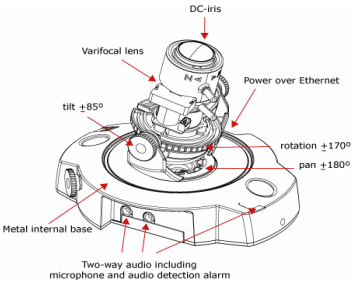	
AXIS 216MFD 10-pack/bulk	AXIS 216MFD in **10-pack**. Cannot be sold separately as single packs. No power supplies.		

AXIS 216MFD-V	1.3 Megapixel 1/3" progressive scan CMOS sensor. Varifocal DC-iris lens. Fixed dome with vandal-resistant and compact indoor casing. Simultaneous Motion JPEG and MPEG-4 in full megapixel 1280x1024 resolution. 12 frames per second in full resolution, 30 frames per second in partial scan 800x600. Video Motion Detection and I/O for alarm/event handling. Two-way audio AAC/G.711 with built-in microphone. Power over Ethernet. Includes power supply.		
AXIS 216MFD-V 10-pack/bulk	AXIS 216MFD-V in **10-pack**. Cannot be sold separately as single packs. No power supplies.		
AXIS P3304	Fixed dome with discreet and tamper-resistant casing. Varifocal 2.8-10 mm lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone, and audio detection. I/O for alarm/event handling. Power over Ethernet. Includes power supply.		**To be launched**
AXIS P3304-V	Fixed dome with discreet and vandal-resistant casing. Varifocal 2.8-10 mm lens. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1 MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone, and audio detection. I/O for alarm/event handling. Power over Ethernet. Includes power supply.		**To be launched**
AXIS 225FD	Varifocal DC-iris lens. 1/4" progressive scan CCD. Auto day/night mode. Fixed dome with discreet, vandal-resistant out-door proof IP66 casing with built-in heater and fan. Up to VGA 640x480 resolution at 30 fps frame rate. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Power over Ethernet. RS-485 for data. Includes cable gland and indoor power supply.		
AXIS 225FD 22mm	Varifocal 9-22 mm DC-iris lens. 1/4" progressive scan CCD. Auto day/night mode. Fixed dome with discreet, vandal-resistant out-door proof IP66 casing with built-in heater and fan. Up to VGA 640x480 resolution at 30 fps frame rate. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Power over Ethernet. RS-485 for data. Includes cable gland and indoor power supply.		

x

AXIS 225FD Outdoor Kit	Varifocal DC-iris lens. 1/4" progressive scan CCD. Auto day/night mode. Fixed dome with discreet, vandal-resistant out-door proof IP66 casing with built-in heater and fan. Up to VGA 640x480 resolution at 30 fps frame rate. Simultaneous Motion JPEG and MPEG-4. Video Motion Detection and I/O for alarm/event handling. Power over Ethernet. RS-485 for data. Includes cable gland and outdoor power		**EOL**
AXIS P3343 12mm	SVGA, day/night, fixed dome with discreet, tamper-resitant indoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection-I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3343 12mm 10-pack/bulk CLEAR	AXIS P3343 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343 12mm 10-pack/bulk SMOKED	AXIS P3343 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
AXIS P3343 6mm	SVGA, day/night, fixed dome with discreet, tamper-resitant indoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection-I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3343 6mm 10-pack/bulk CLEAR	AXIS P3343 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343 6mm 10-pack/bulk SMOKED	AXIS P3343 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		

x

AXIS P3343-V 12mm	SVGA, day/night, fixed dome with discreet, vandal-resistant indoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection-I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3343-V 12mm 10-pack/bulk CLEAR	AXIS P3343-V 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343-V 12mm 10-pack/bulk SMOKED	AXIS P3343-V 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
AXIS P3343-V 6mm	SVGA, day/night, fixed dome with discreet, vandal-resistant indoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection-I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3343-V 6mm 10-pack/bulk CLEAR	AXIS P3343-V 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343-V 6mm 10-pack/bulk SMOKED	AXIS P3343-V 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		

x

AXIS P3343-VE 12mm	SVGA, day/night, fixed dome with discreet vandal-resitant, IP66-rated outdoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio detection and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.		
AXIS P3343-VE 12mm 4-pack/bulk CLEAR	AXIS P3343-VE 12mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343-VE 12mm 4-pack/bulk SMOKED	AXIS P3343-VE 12mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
AXIS P3343-VE 6mm	SVGA, day/night, fixed dome with discreet vandal-resitant, IP66-rated outdoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max SVGA resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio detection and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.		
AXIS P3343-VE 6mm 4-pack/bulk CLEAR	AXIS P3343-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3343-VE 6mm 4-pack/bulk SMOKED	AXIS P3343-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		

AXIS P3344 12mm	HDTV, day/night, fixed dome with discreet tamper-resitant indoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	
AXIS P3344 12mm 10-pack/bulk CLEAR	AXIS P3344 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.	
AXIS P3344 12mm 10-pack/bulk SMOKED	AXIS P3344 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.	
AXIS P3344 6mm	HDTV, day/night, fixed dome with discreet tamper-resitant indoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.	
AXIS P3344 6mm 10-pack/bulk CLEAR	AXIS P3344 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.	
AXIS P3344 6mm 10-pack/bulk SMOKED	AXIS P3344 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.	

AXIS P3344-V 12mm	HDTV, day/night, fixed dome with discreet vandal-resitant indoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3344-V 12mm 10-pack/bulk CLEAR	AXIS P3344-V 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3344-V 12mm 10-pack/bulk SMOKED	AXIS P3344-V 12mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
AXIS P3344-V 6mm	HDTV, day/night, fixed dome with discreet vandal-resitant indoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio with built-in microphone and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers.		
AXIS P3344-V 6mm 10-pack/bulk CLEAR	AXIS P3344-V 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3344-V 6mm 10-pack/bulk SMOKED	AXIS P3344-V 6mm in 10-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		

AXIS P3344-VE 12mm	HDTV, day/night, fixed dome with vandal-resitant, IP66-rated outdoor casing. Varifocal 3.3-12 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio detection and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.		
AXIS P3344-VE 12mm 4-pack/bulk CLEAR	AXIS P3344-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3344-VE 12mm 4-pack/bulk SMOKED	AXIS P3344-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
AXIS P3344-VE 6mm	HDTV, day/night, fixed dome with vandal-resitant, IP66-rated outdoor casing. Varifocal 2.5-6 mm DC-iris lens, remote focus and zoom. Multiple, individually configurable H.264 and Motion JPEG streams; max HDTV 720p or 1MP resolution at 30 fps. WDR. Video motion detection and active tampering alarm. Two-way audio detection and audio detection. I/O for alarm/event handling. SD/SDHC memory card slot for optional local video storage. Operation in -40°C to +55°C powered by standard Power over Ethernet. Midspan not included. Includes smoked and clear transparent covers, weather shield against sun, rain or snow, and 5m Ethernet cable with mounted gasket.		
AXIS P3344-VE 6mm 4-pack/bulk CLEAR	AXIS P3344-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Clear transparent cover only.		
AXIS P3344-VE 6mm 4-pack/bulk SMOKED	AXIS P3344-VE 6mm in 4-pack. Cannot be sold separately as single packs. No Midspans. Smoked transparent cover only.		
Pan/Tilt/Zoom Cameras			

AXIS 212 PTZ	Pan/tilt/zoom camera without moving parts. 3x zoom. 140 degrees pan and 105 degrees tilt. Up to VGA resolution at 30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O for alarm/event handling. Two-way Audio. Includes wall mount kit and power supply.	
AXIS 212 PTZ 10 pack/bulk	AXIS 212 PTZ in **10 pack**. Cannot be sold separately as single packs. Power supplies included.	
AXIS 212 PTZ-V	Vandal resistant version of AXIS 212 PTZ. Pan/tilt/zoom camera without moving parts. 3x zoom. 140 degrees pan and 105 degrees tilt. Up to VGA resolution at 30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O for alarm/event handling. Two-way Audio. Includes wall mount kit and power supply.	
AXIS 212 PTZ-V 10 pack/bulk	AXIS 212 PTZ-V in **10 pack**. Cannot be sold separately as single packs. Power supplies included.	
AXIS 213 PAL	Auto iris auto focus zoom lens. IR mode for nighttime conditions. Up to 4CIF resolution at 30 fps frame rate. Motion JPEG and MPEG-4. I/O for alarm/event handling. Audio full duplex G.711 (with AXIS 213CM). Includes ceiling and desktop mount kit and power supply.	
AXIS 214 PTZ 50Hz	Pan/tilt/zoom (x18) camera. Auto-iris, automatic day/night, and auto-focus zoom lens. Up to 4CIF resolution at 30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O for alarm/event handling. Two-way Audio full duplex. Includes ceiling mount kit and power supply.	
AXIS 214 PTZ 60Hz	Pan/tilt/zoom (x18) camera. Auto-iris, automatic day/night, and auto-focus zoom lens. Up to 4CIF resolution at 30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O for alarm/event handling. Two-way Audio full duplex. Includes ceiling mount kit and power supply.	
AXIS 215 PTZ 50Hz	Compact Pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and auto-focus zoom lens. Up to 4CIF resolution at 25/30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O connections for alarm/event handling. Two-way, full duplex audio. Includes power supply, mounting kit for hard and drop ceiling and transparent cover smoked and clear.	

x

AXIS 215 PTZ 60Hz	Compact Pan/tilt/zoom (12x) camera including auto-iris, automatic day/night, and auto-focus zoom lens. Up to 4CIF resolution at 25/30 fps frame rate. Simultaneous MPEG-4 and Motion JPEG. I/O connections for alarm/event handling. Two-way, full duplex audio. Includes power supply, mounting kit for hard and drop ceiling and transparent cover smoked and clear.	
AXIS 215 PTZ-E 50Hz	Outdoor, IP66-rated pan/tilt/zoom camera including auto-iris, automatic day/night, and autofocus 12x zoom lens. Up to 4CIF resolution at 30/25 fps. Simultaneous MPEG-4 and Motion JPEG. Pre-mounted wall bracket, 5-meter power and Ethernet cables. 100 - 240 V AC power input. Clear dome bubble.	
AXIS 215 PTZ-E 60Hz	Outdoor, IP66-rated pan/tilt/zoom camera including auto-iris, automatic day/night, and autofocus 12x zoom lens. Up to 4CIF resolution at 30/25 fps. Simultaneous MPEG-4 and Motion JPEG. Pre-mounted wall bracket, 5-meter power and Ethernet cables. 100 - 240 V AC power input. Clear dome bubble.	
AXIS P5534 50Hz	HDTV 720p compliant PTZ camera with 18x optical zoom for indoor use. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night, two-way audio, I/O, IP51. Includes HiPoE midspan, smoked and clear dome covers and mounting kit for hard and drop ceilings	
AXIS P5534 50Hz OUTDOOR T95A00 KIT	Bundle with unit of AXIS 5534 50Hz and 1 unit of AXIS T95A00 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 100-240 VAC input. HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included.	
AXIS P5534 50Hz OUTDOOR T95A10 KIT	Bundle with unit of AXIS 5534 50Hz and 1 unit of AXIS T95A10 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 24 VAC input. (Recommended power supply PS24). HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included.	
AXIS P5534 60Hz	HDTV 720p compliant PTZ camera with 18x optical zoom for indoor use. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night, two-way audio, I/O, IP51. Includes HiPoE midspan, smoked and clear dome covers and mounting kit for hard and drop ceilings	

x

AXIS P5534 60Hz OUTDOOR T95A00 KIT	Bundle with unit of AXIS 5534 60Hz and 1 unit of AXIS T95A00 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 100-240 VAC input. HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included		
AXIS P5534 60Hz OUTDOOR T95A10 KIT	Bundle with unit of AXIS 5534 60Hz and 1 unit of AXIS T95A10 housing. Camera is delivered pre-mounted in the outdoor IP66 rated housing. Includes clear and smoked bubble. 24 VAC input. (Recommended power supply PS24). HDTV 720p compliant PTZ camera with 18x optical zoom. HDTV 720p @ 25/30fps (1280x720) in H.264 and Motion JPEG, Day & Night. Mounting bracket not included.		
Pan/Tilt/Zoom Dome Cameras			
AXIS 231D+ 50 Hz	Auto iris auto focus zoom lens. 1/4" CCD. WDR. Down to 0.3 lux. Continuous 360° rotation. >0° to -90° tilt range. Up to 4CIF resolution at 30 fps frame rate. Motion JPEG and MPEG-4. I/O for alarm/event handling. Includes hard and drop ceiling mount kit and power supply.		**EOL**
AXIS 231D+ 60 Hz	Auto iris auto focus zoom lens. 1/4" CCD. WDR. Down to 0.3 lux. Continuous 360° rotation. >0° to -90° tilt range. Up to 4CIF resolution at 30 fps frame rate. Motion JPEG and MPEG-4. I/O for alarm/event handling. Includes hard and drop ceiling mount kit and power supply.		**EOL**
AXIS 232D+ 50 Hz	Auto iris auto focus zoom lens. 1/4" CCD. WDR. Down to 0.3 lux in color. Auto day/night mode. Continuous 360° rotation. >0° to -90° tilt range. Up to 4CIF resolution at 30 fps frame rate. Motion JPEG and MPEG-4. I/O for alarm/event handling. Includes hard and drop ceiling mount kit and power supply.		
AXIS 232D+ 60 Hz	Auto iris auto focus zoom lens. 1/4" CCD. WDR. Down to 0.3 lux in color. Auto day/night mode. Continuous 360° rotation. >0° to -90° tilt range. Up to 4CIF resolution at 30 fps frame rate. Motion JPEG and MPEG-4. I/O for alarm/event handling. Includes hard and drop ceiling mount kit and power supply.		

AXIS 233D 50 Hz	35x optical zoom dome camera with WDR and area zoom. Auto day/night mode down to 0.5 lux in color and 0,008 in night mode. Continuous 360º rotation and 180º tilt with E-flip. Progressive Scan 4CIF resolution at 30/25fps in MPEG-4 or Motion JPEG. Two-way audio, I/O for alarm/event handling. Includes hard and drop ceiling mount kit, smoked and clear transparent covers and power supply.	
AXIS 233D 60 Hz	35x optical zoom dome camera with WDR and area zoom. Auto day/night mode down to 0.5 lux in color and 0,008 in night mode. Continuous 360º rotation and 180º tilt with E-flip. Progressive Scan 4CIF resolution at 30/25fps in MPEG-4 or Motion JPEG. Two-way audio, I/O for alarm/event handling. Includes hard and drop ceiling mount kit, smoked and clear transparent covers and power supply.	
AXIS Q6032-E 50 Hz	Outdoor-ready, IP66-rated, PTZ dome camera with 35x optical zoom. Arctic Temperature Control enables operation and start up from -40 °C to +50 °C. WDR. Auto day/night mode down to 0.5 lux in color and 0.008 in night mode. Continuous 360º rotation and 220º tilt with E-flip. Progressive scan 4CIF resolution at 30/25 fps in H.264 and Motion JPEG. Auto-tracking. Power through High PoE only. Includes smoked and clear transparent bubble and High PoE midspan. No mounting bracket included (several different available as accessories).	
AXIS Q6032-E 60 Hz	Outdoor-ready, IP66-rated, PTZ dome camera with 35x optical zoom. Arctic Temperature Control enables operation and start up from -40 °C to +50 °C. WDR. Auto day/night mode down to 0.5 lux in color and 0.008 in night mode. Continuous 360º rotation and 220º tilt with E-flip. Progressive scan 4CIF resolution at 30/25 fps in H.264 and Motion JPEG. Auto-tracking. Power through High PoE only. Includes smoked and clear transparent bubble and High PoE midspan. No mounting bracket included (several different available as accessories).	
AXIS Q6032-E 60 Hz Wall	Outdoor-ready, IP66-rated, PTZ dome camera with 35x optical zoom. Arctic Temperature Control enables operation and start up from -40 °C to +50 °C. WDR. Auto day/night mode down to 0.5 lux in color and 0.008 in night mode. Continuous 360º rotation and 220º tilt with E-flip. Progressive scan 4CIF resolution at 30/25 fps in H.264 and Motion JPEG. Auto-tracking. Power through High PoE only. Includes AXIS T91A61 Wall Bracket, smoked and clear transparent bubble and High PoE midspan.	

x

Thermal Cameras		
AXIS Q1910	Indoor Thermal Network Camera, 160x128 resolution, 8.33 fps, and 17° angle of view. It supports ONVIF, PT heads, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS Camera Application Platform.	
AXIS Q1910-E	Outdoor ready Thermal Network Camera, IP66-rated, 160x128 resolution, 8.33 fps, and 17° angle of view. It supports ONVIF, PT heads, H.264, audio, local storage, I/O, PoE, tampering alarm, motion detection, and AXIS Camera Application Platform.	

GMax
49 Vinh Phuc Str, Ba Dinh Dis, Hanoi, Vietnam
844.37618436/37
www.gmax.com.vn
Sales@gmax.com.vn